

**Important Notice!** Autonomous operation of FindMe beacon within 2 years is possible only in the zone of moderate climate and in case of strong signal of cellular network.


**Important Notice!** Switching on the search mode decreases significantly the duration of device autonomous work. The cost of device includes subscriber fee and cost of GPRS traffic to the carrier (OJSC "MTS") on the territory of the Russian Federation for the whole service period. At the end of service life you can prolong servicing contacting FindMe dealers.

**Important Notice!** You are FORBIDDEN to replace batteries by yourself!

You can familiarize with similar information at the web-site [www.911.fm](http://www.911.fm).


## How to turn on and log on the device

1. To turn on FindMe press and hold pressed the button "ACT" for 1-3 seconds.

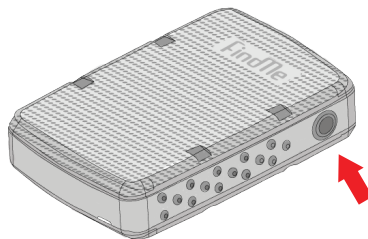


**Important Notice!** FindMe will be controlled only from the phone number used to send SMS message. Server will also send messages only to this number. You can change the phone number to control the device at [www.911.fm](http://www.911.fm).

2. Send a blank SMS text message or a message with a desired name from your mobile phone to the phone number indicated on the rear side of your device FindMe (for example "My Auto"). The above SMS text message shall be sent within 15 minutes after "ACT" button application.

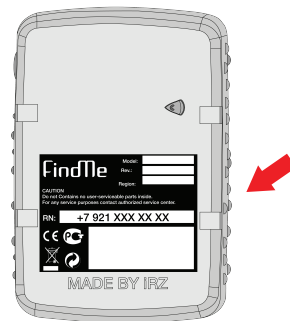

**Important Notice!** To provide correct log on, use an individual desired name of the device with the length of 10 symbols, maximum (including gaps).

3. Within 3-5 minutes after sending the SMS you will receive two messages in series.

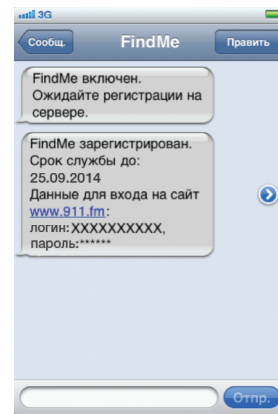

**Important Notice!** Any delays in SMS text message reception relate to your network operator. The phone number given on the device rear side is used only for log on.

If in the course of log on, 30 minutes later from sending your SMS you don't receive a response message, repeat the process of turn on and log on once again. If the repeated try is unsuccessful, appeal to the technical support service **8-800-100-28-77**.

There is a possibility to log on several devices for one phone number. Information about dealing with several FindMe devices is given in the detailed instruction, which is accessible at the web-site [www.911.fm](http://www.911.fm).

## Recommendations for Installation

Installing FindMe in the concealed place, please, note that no moving elements, heat-generating parts or items shall be near the device.


In addition, it is not recommended to install FindMe directing its logotype to metal parts of the body.

**Important Notice!** Correct operation of FindMe is possible only if cellular network signal (OJSC "MTS") and GPRS service is present.

The device is damp proof.


## Enabling the tracking mode

1. To activate the search mode send a blank SMS message to the phone number **+7-911-770-8888**

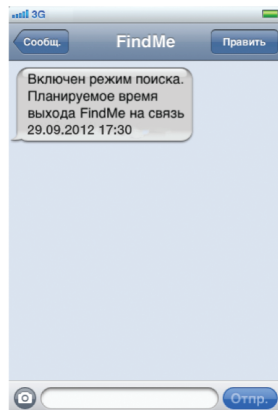


Within 3-5 minutes you will receive message that the tracking mode is enabled with scheduled time of FindMe contact with the server. You can also activate the search mode at the web-site [www.911.fm](http://www.911.fm)

2. When FindMe contacts with the server you will receive a message with coordinates and speed of the device movement.

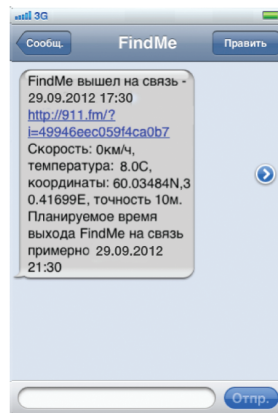


You can see location of the device on the map visiting the Internet address mentioned in the message.

**Warning!** If your phone doesn't support the function of browsing web-pages, you can see all information at the web-site [www.911.fm](http://www.911.fm).

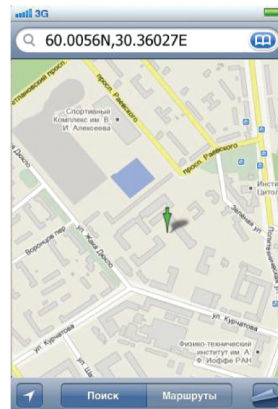

## Disabling the search mode

To deactivate the search mode send an SMS message with the text «OFF» to the phone number **+7-911-770-8888**.

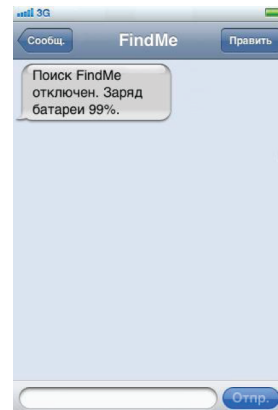

## Check of device state

To check FindMe state, send "S" SMS message to phone number **+7-911-770-8888**.

